


Transponder Mounting Instructions

1. **Clean** and dry the mounting surface.
2. **Remove** the clear plastic from the back of the mounting strips. If your transponder has suction cups, go to the next step. **Note:** Some customers find that **applying** a thin layer of petroleum jelly around the bottom of the suction cups helps to provide a secure seal to their windshield.
3. **Position** the transponder on the inside of your windshield behind the rear view mirror and below any tinting.
4. **Place** the transponder on the windshield with the E-ZPass logo upright, facing you and press firmly.

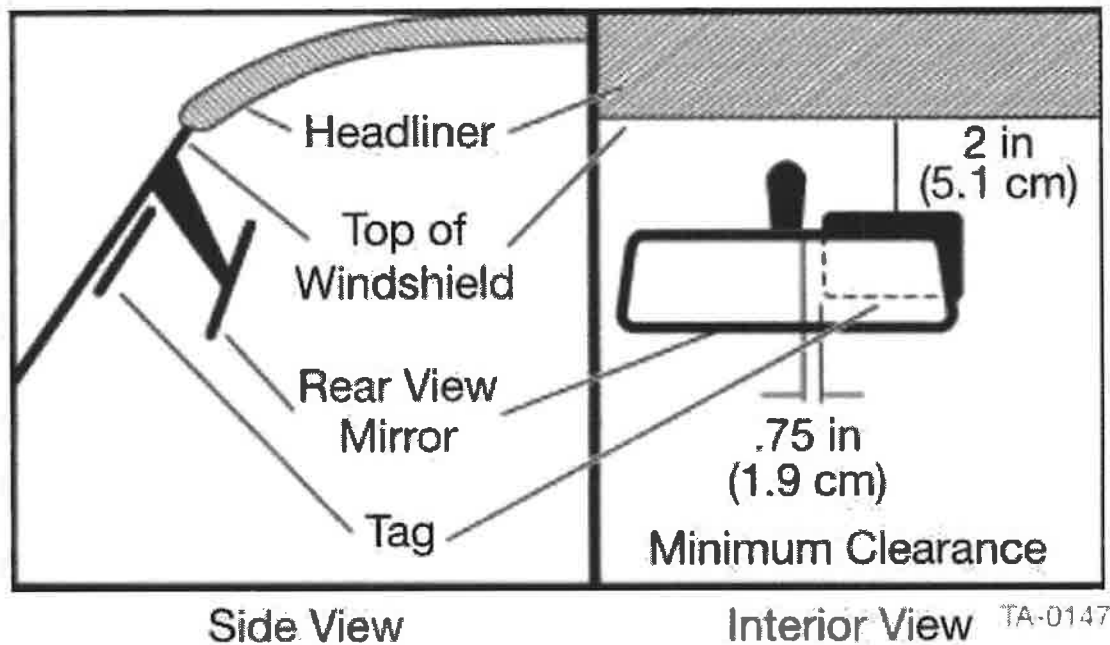

- **Do not** submerge the interior transponder in water or use any type of cleaning agents.
- **Do not** cover the transponder with any type of varnish, paint or marker.
- **Do not** modify or alter the transponder in any way. You will be charged a damage fee for transponders that are physically damaged or defaced.

Please be advised the transponder is constructed of plastic and extra care must be taken to avoid damage.

The PA Turnpike E-ZPass Customer Service Center and/or its affiliates are not liable for electronic misreads or traffic violations due to improper mounting or use of transponders.